

UHF antenna

DIGIT & DIGITactiva



The **DIGIT & DIGITactiva** antennas are designed to receive digital (DVB-T) and analogue terrestrial TV signals in the UHF band (Ch.21 ÷ Ch.69), in areas with strong or medium TV signal level. The antennas unique engineering solutions offers a flat gain over the whole frequency range.

The **DIGIT** antennas could be placed horizontally almost everywhere on the house, roof, balcony etc.

The antennas drop tight high-quality ABS shield ensures exceptional durability and a light weight.


- Good reception of distant stations.
- Built-in TV preamplifier - DIGITactiva.
- Install on a house, balcony, roof etc.
- Modern, light and stable construction.
- Resistant to wind and atmospheric conditions.
- Easy to assembly – without any tools.

TECHNICAL SPECIFICATIONS


TYPE		DIGIT	DIGITactiva
Operating frequency	MHz	470 ÷ 860 (UHF: Ch.21 ÷ Ch.69)	
Gain	dB	4,5 ± 1,0	28
Polarity	/	horizontal (H)	
Noise figure	dB	/	2
Max. output signal level - for 2 TV signals	dBuV	/	103
Internal preamplifier power supply	/	/	adjustable power supply 230 VAC / 7÷12V DC (via coaxial cable and DC- separator)
Current consumption	mA	/	45 @ 12V DC
Mast diameter	mm	25 ÷ 45	
Color	/	blue*	

* other colors available upon request.

HORIZONTAL OPENING DIAGRAM

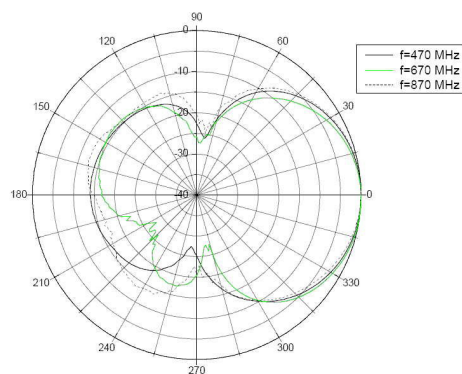

VERTICAL OPENING DIAGRAM

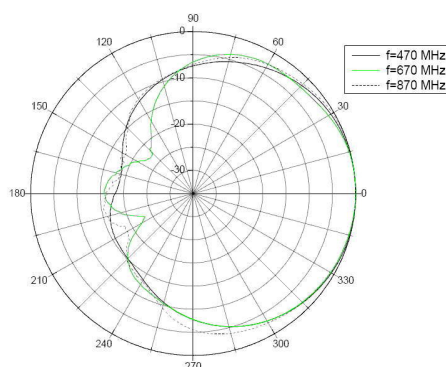

www.telmor.pl